
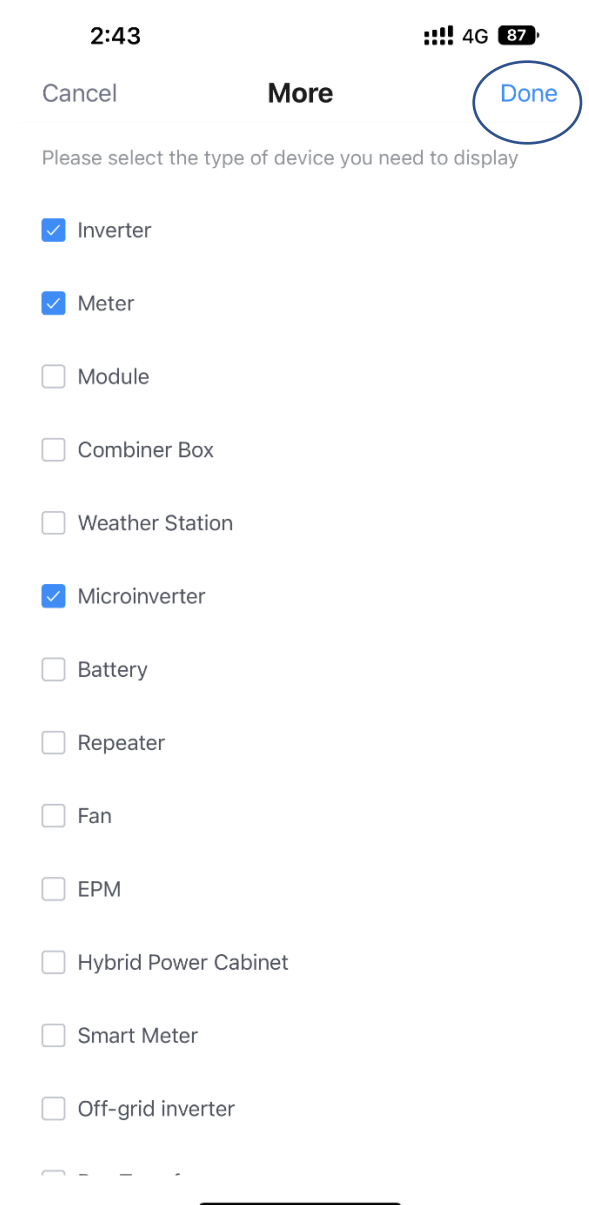





How to adjust active power for Deye microinverters

1, Login to the APP of "Solarman Business"



Before process, please ensure your solarman account has obtained the permission to "modify equipment information". If needed, please contact Deye via service@deye.com.cn

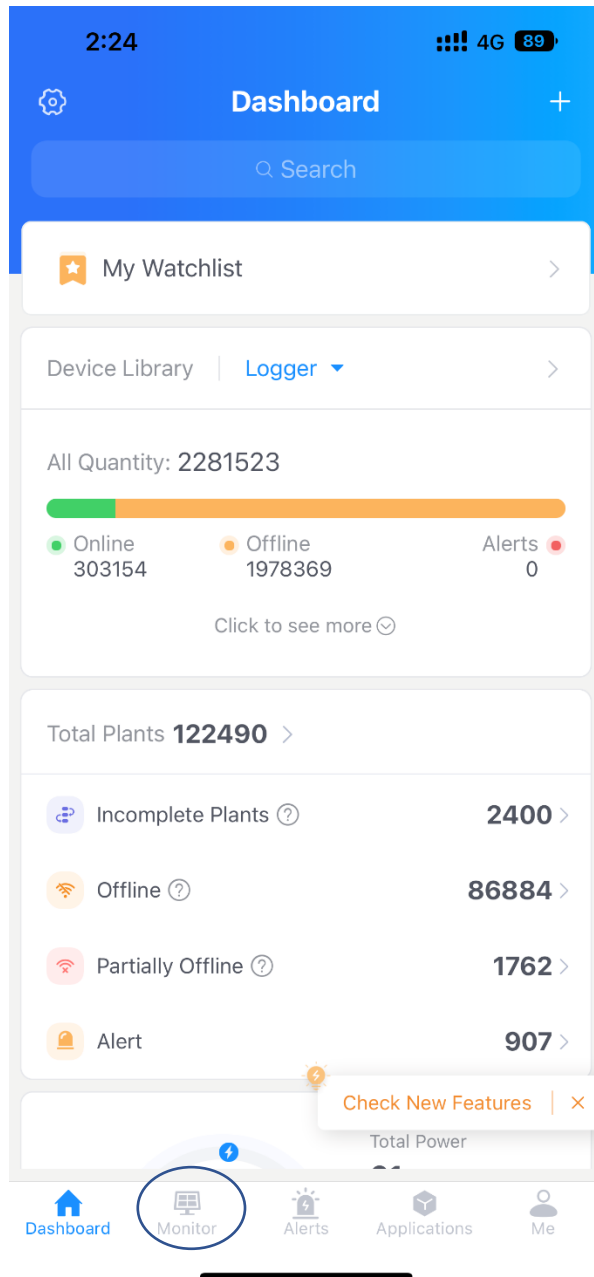

2, Go to the below page and tick the icon of “search” and then input the SN of inverter.

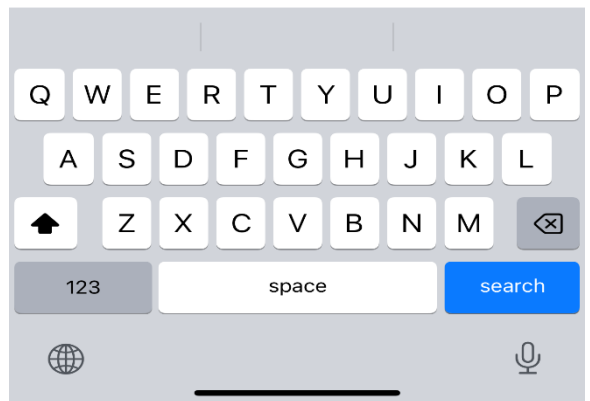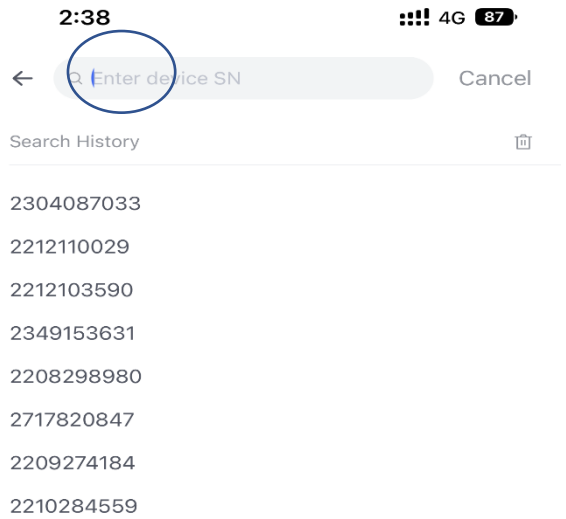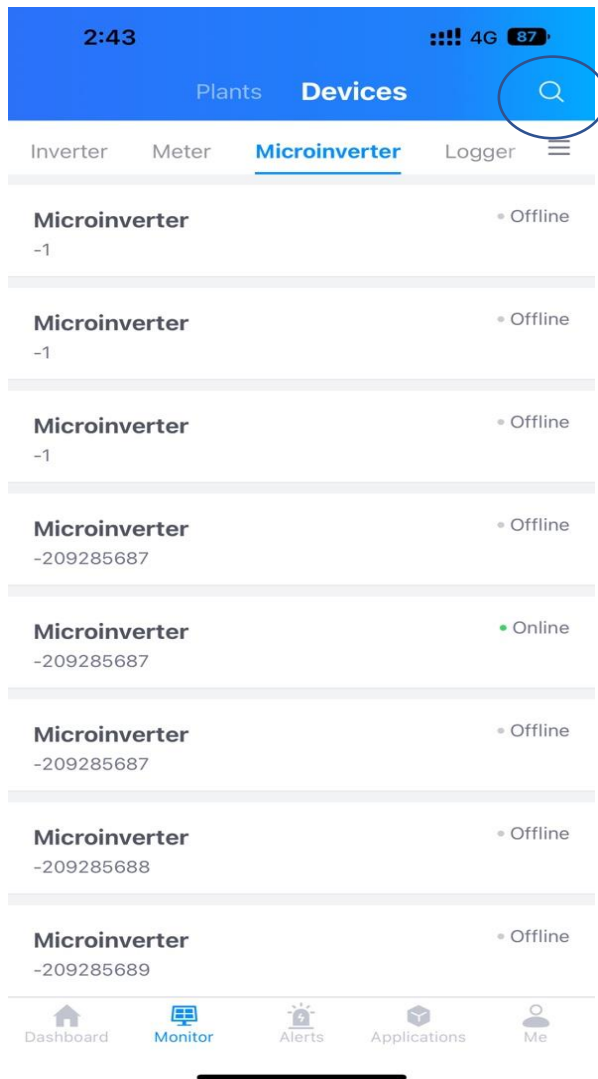

3, Tick the upper right corner and then tick "Remote Control".

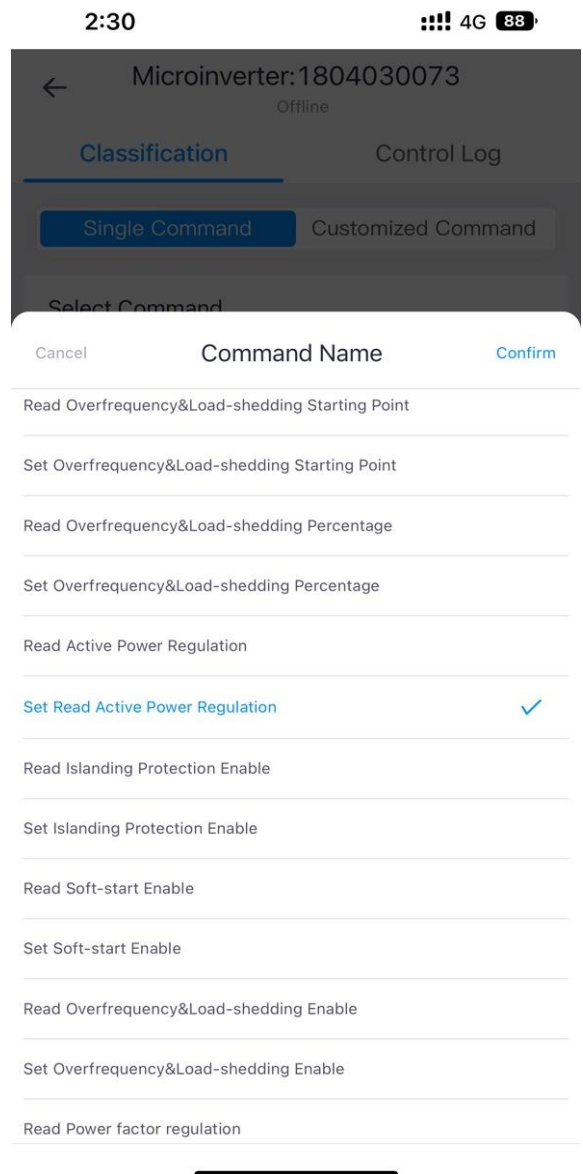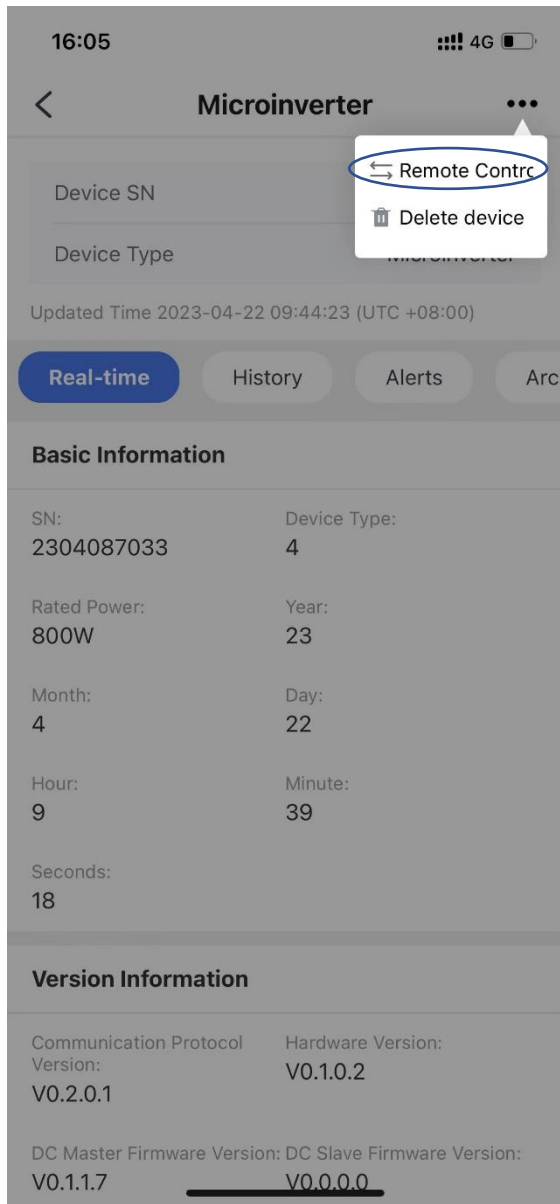

4, For example this 800W microinverter SN of 2304087033, and we can change it to 600W via setting 75% at the "Inputs" below. ($800 \times 0.75 = 600W$)

16:06 4G

← Microinverter:2304087033
Offline

Classification Control Log

Single Command Customized Command

Select Command

Command Name

Set Read Active Power Regulation

Command Type

Settings

Inputs

0-100 75 %

Timeout ⓘ

1Minute

Send Command

Last Command Record

